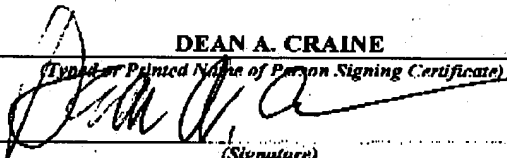


CERTIFICATE OF TRANSMISSION BY FACSIMILE (37 CFR 1.8)			Docket No.
Applicant(s): JOHN GARLAND			GARJ 101
Serial No. 10/648,612	Filing Date AUGUST 26, 2003	Examiner A. ESTRAD	Group Art Unit 2831
Invention: IMPROVED AUDIO CABLE			
		RECEIVED CENTRAL FAX CENTER	
OFFICIAL		MAY 26 2004	
I hereby certify that this <u>OFFICE ACTION AMENDMENT & COPY OF PRELIMINARY AMENDMENT</u> (Identify type of correspondence)			
is being facsimile transmitted to the United States Patent and Trademark Office (Fax. No. <u>703-872-9306</u>)			
on <u>MAY 26, 2004</u> (Date)			
<div style="text-align: center;"><u>DEAN A. CRAINE</u> (Typed or Printed Name of Person Signing Certificate)  (Signature)</div>			
<p style="text-align: center;">Note: Each paper must have its own certificate of mailing.</p>			

P18/REV01

UNITED STATES PATENT AND TRADEMARK OFFICE

Application No.: 10/648,612 Confirmation No.: 4369
Applicant: JOHN GARLAND
Filing Date: AUGUST 27, 2002
Title: IMPROVED AUDIO CABLE
Group Art Unit: 2831
Examiner: ANGEL R. ESTRADA
Attorney Docket No: GARJ 101

RECEIVED
CENTRAL FAX CENTER
MAY 26 2004

OFFICIAL

May 26, 2004

Bellevue, Washington 98004

Mail Stop Non-Fee Amendment
COMMISSIONER OF PATENTS
P.O. Box 1450
Alexandria, VA 22313-1450

AMENDMENT

In response to the Office Action of March 2, 2004, please amend the above-identified application as follows.

Amendments to the Abstract is shown on page 2 of this paper.

Amendments to the Claims are reflected in the listing of claims, which begins on page 3 of this paper.

Remarks/Arguments begin on page 7 of this paper.

Amendment to the Abstract

Please replace the original Abstract with the following replacement Abstract:

An improved audio cable comprising with low capacitance and low inductance that uses at least one pair of first and second insulated conductors located on opposite sides of a shielding member that extends the entire length of the cable. The first and second conductors are located on opposite sides of the shielding member. Bores, also called lenses, are formed on the shielding member that allow exposure of the magnetic fields of the first and second conductors to reduce inductance. In the first embodiment, the shielding member is a flat structure twisted into spiral with the conductors on opposite sides of the shielding member. The conductors and shielding member may be covered with an outer shielding member that only extends over the lenses or the entire length of the cable and covered by a durable, protective outer cover.